

RADIAL



DELIVUM

CATALOG
RADIAL
2025

DRIVE
YOUR
SOUL

<h2>Road Symbiosis</h2>	<p>Our Symbiosis with the Road comes from over 50 years of experience in rubber manufacturing.</p>
-------------------------	--




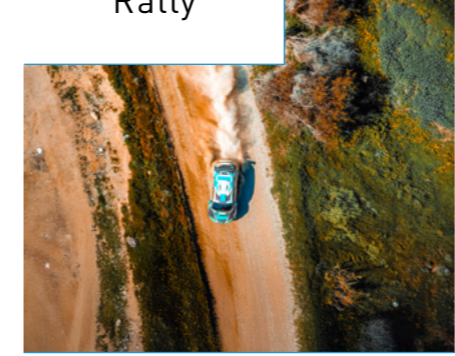

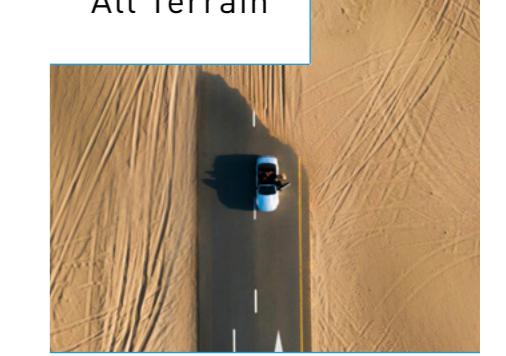

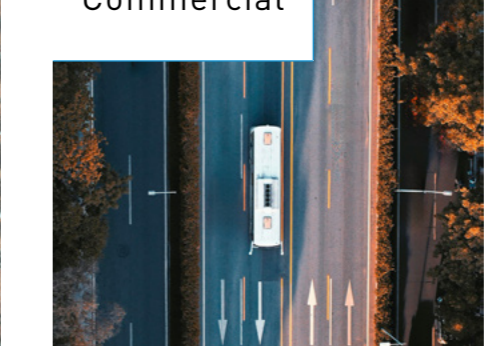

Following the human evolution process we provided shoes in the very beginning, then moving on and creating bicycle tires and tubes.

Deli Tires manufactures a wide range of the tire products, from wheelbarrows tires to high performance car tires.

That's why we are the human motion technology experts. To seek the perfect journey you only need the perfect companion. You choose the destination, we take care of how to get you there. Safe and quickly.

No matter which path you choose or the conditions you face, we will always be there, supporting you.

OUR PHILOSOPHY
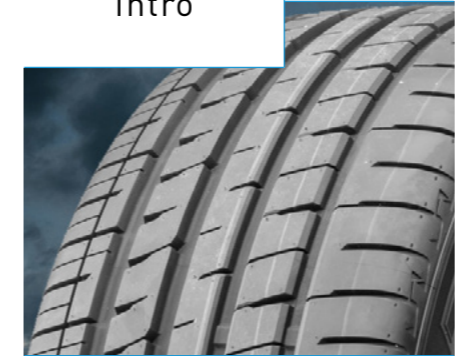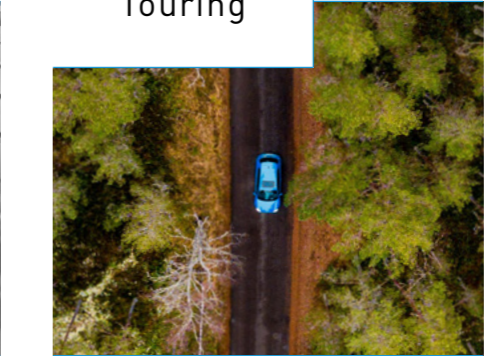
<p>Intro</p> 	<p>04 - 05</p>	<p>Touring</p> 	<p>06 - 13</p> <p>High Performance</p> 	<p>14 - 19</p>
<p>Rally</p> 	<p>20 - 21</p> <p>Highway Terrain</p> 	<p>22 - 24</p> <p>All Terrain</p> 	<p>25 - 30</p>	
<p>Mud Terrain</p> 	<p>31 - 36</p> <p>Commercial</p> 	<p>37 - 47</p> <p>Truck Bus Radial</p> 	<p>48-49</p>	

Our Certifications



How to read Sidewall Info

An alphanumeric code indicates the type and the complete data specification. This code is universal and permits you to choose the tire that best suited to your needs.

PASSENGER CARS

European Metric Designation

185	/70	R	14	88	H
CROSS-SECTION WIDTH (mm)	RATIO OF CROSS-SECTION HEIGHT TO WIDTH (%)	RADIAL CONSTRUCTION	RIM DIAMETER (INCH)	LOAD INDEX	SPEED SYMBOL

PASSENGER CARS

P - Metric Designation

P	205	/65	R	15	94	H
PASSENGER CAR TIRE	CROSS-SECTION WIDTH (mm)	RATIO OF CROSS-SECTION HEIGHT TO WIDTH (%)	RADIAL CONSTRUCTION	RIM DIAMETER (INCH)	LOAD INDEX	SPEED SYMBOL

LIGHT TRUCKS

LT Metric Designation

LT	265	/75	R	16	112/119	Q
LIGHT TRUCK TIRE	CROSS-SECTION WIDTH (mm)	RATIO OF CROSS-SECTION HEIGHT TO WIDTH (%)	RADIAL CONSTRUCTION	RIM DIAMETER (INCH)	LOAD INDEX	SPEED SYMBOL

LIGHT TRUCKS

Flotation Designation

31	X	10.50	R	15	LT	109	Q
OVERALL DIAMETER (inch)		NOMINAL CROSS-SECTION WIDTH (INCH)	RADIAL CONSTRUCTION	RIM DIAMETER (INCH)	LIGHT TRUCK TIRE	LOAD INDEX	SPEED SYMBOL

Use >

- RACING
- CITY
- HIGH SPEED
- TOURING
- OFF-ROAD
- RALLY

Plus >

- RAIN & WET
- COMFORT
- DURABILITY
- WEAR LIFE
- HANDLING

Eco >

- LOW NOISE
- SAVE FUEL



The 3 Peak Mountain Snowflake (3PMSF) symbol is a winter tire certification given to tires that meet specific performance criteria in snowy conditions. This certification is recognized internationally and indicates that a tire is suitable for use in severe snow conditions.

Directional Unidirectional




The Unidirectional tire main feature is the "arrow" shaped pattern. All grooves point in the same direction, increasing water dispersion braking performance. For high-speed performance.

Non - Directional Symmetrical



"Wave like" patterns with continuous rib design allow this tire to reduce the noise and to provide water dispersion, taking advantage from the lateral grooves.


Asymmetrical

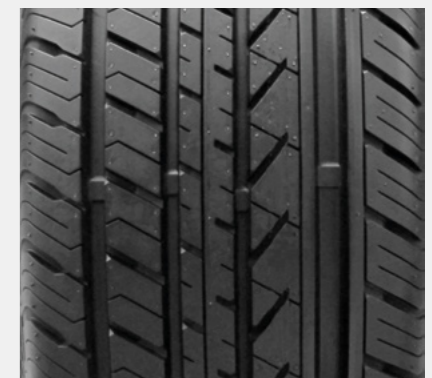

High performance tires. Asymmetrical pattern ensure handling capabilities on both wet and dry roads.

Touring

You never know what lies around the next corner.
Which is why our Touring tires makes sure you're ready for anything.

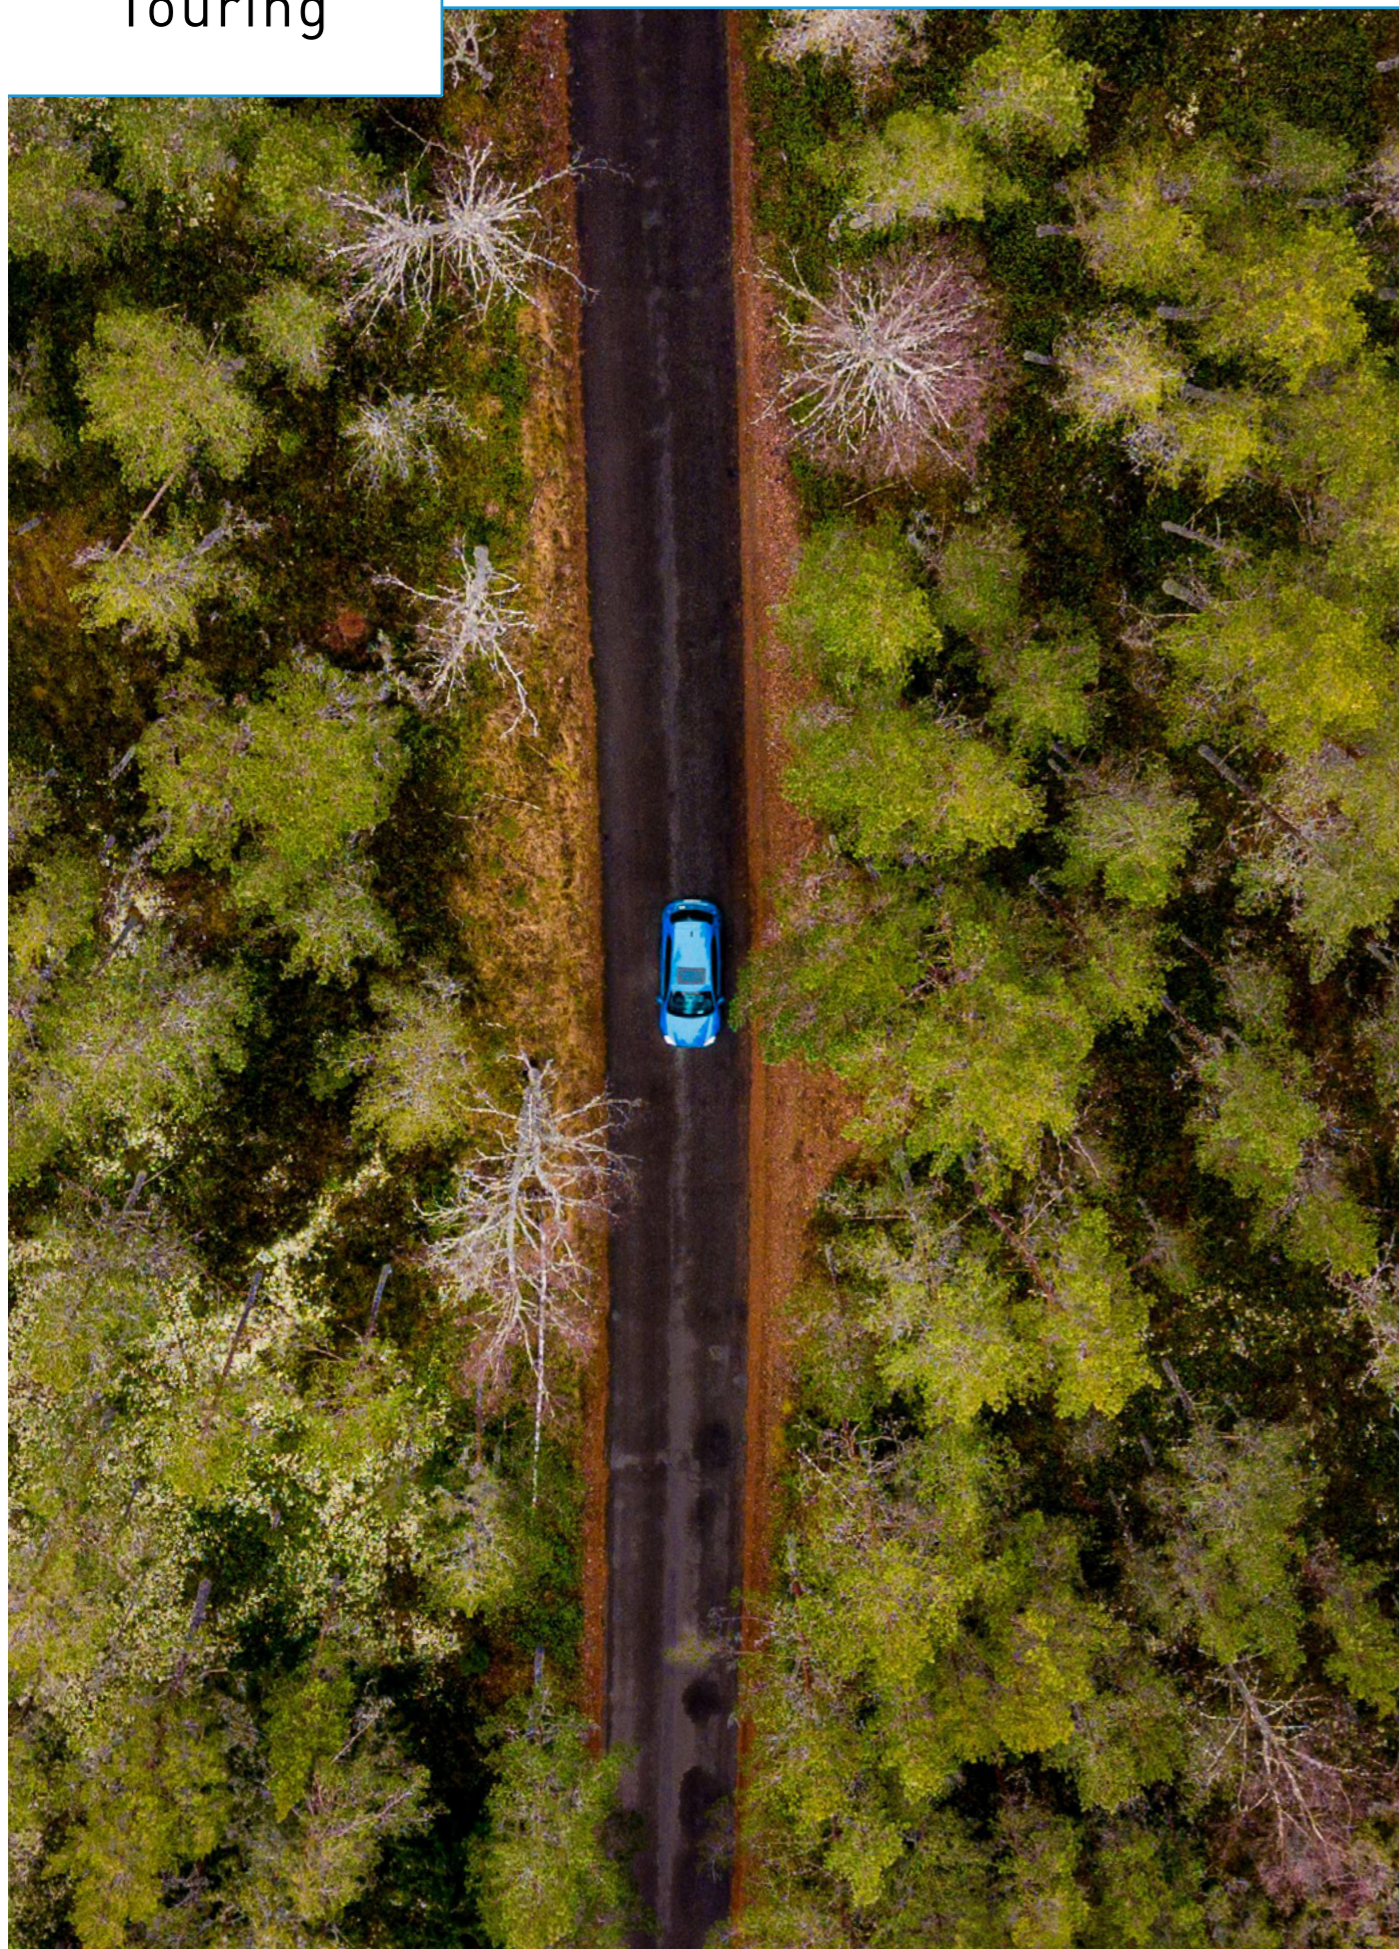

Evolution



NON DIRECTIONAL

IA-101



CITY



WEAR LIFE



RAIN & WET



LOW NOISE



SAVE FUEL

S2WR2

READY

SIZE	LI/SI index	R.W. inch	O.D. mm	S.W. mm	N.S.D. mm	MAX LOAD kg	MAX LOAD lbs.	INFLATION bar	INFLATION psi
155/70R12	73S	4,5	523	153	6,8	365	805	3,0	44
175/70R13	82H	5,0	577	175	8,0	475	1050	2,5	36
185/70R14	88H	5,5	615	190	8,2	560	1235	2,5	36
195/70R14	91H	6,0	630	202	8,2	615	1355	2,5	36



Evolution 2

NON DIRECTIONAL

IA-102



CITY



WEAR LIFE



HANDLING



LOW NOISE



SAVE FUEL

SIZE	LI/SI index	R.W. inch	O.D. mm	S.W. mm	N.S.D. mm	MAX LOAD kg	MAX LOAD lbs.	INFLATION bar	INFLATION psi
165/80R13	83S	4,5	593	163	7,5	487	1075	2,4	35
185/60R14	82H	5,5	578	185	8,0	475	1045	2,5	36
205/65R15	94H	6,0	647	201	8,0	670	1475	2,5	36



Evolution SP2

NON DIRECTIONAL

IA-108



CITY



RAIN & WET



HANDLING



LOW NOISE



SAVE FUEL

SIZE	LI/SI index	R.W. inch	O.D. mm	S.W. mm	N.S.D. mm	MAX LOAD kg	MAX LOAD lbs.	INFLATION bar	INFLATION psi
165/80R13	83S	4,5	594	165	7,2	487	1075	2,4	35
185/70R14	88H	5,5	616	191	7,9	560	1235	2,5	36



Evolution XTR

NON DIRECTIONAL

IA-105



CITY



WEAR LIFE



COMFORT



LOW NOISE



SAVE FUEL

SIZE	LI/SI index	R.W. inch	O.D. mm	S.W. mm	N.S.D. mm	MAX LOAD kg	MAX LOAD lbs.	INFLATION bar	INFLATION psi
165/80R13	83S	4,5	596	173	7,7	487	1075	2,4	35
175/70R13	82S	5,0	576	180	8,0	475	1045	2,5	36
185/70R14	88S	5,5	618	193	8,0	560	1235	2,5	36
185/65R15	88S	5,5	626	189	8,0	560	1235	2,5	36
195/65R15	91S	6,0	638	203	8,0	615	1355	2,5	36
205/65R15	94H	6,0	646	207	8,0	670	1475	2,5	36



Velocità UHP

UNIDIRECTIONAL

IA-151



RACING



WEAR LIFE



HANDLING

SIZE	LI/SI index	R.W. inch	O.D. mm	S.W. mm	N.S.D. mm	MAX LOAD kg	MAX LOAD lbs.	INFLATION bar	INFLATION psi
165/70R13	79S	5,0	562	169	7,5	437	965	2,5	36
175/70R13	82H	5,0	576	179	7,5	475	1045	2,5	36
185/70R13	86H	5,5	590	187	7,8	530	1170	2,5	36
185/65R14	86H	5,5	595	191	7,8	530	1170	2,5	36
215/45ZR17	91W	7,0	624	215	7,8	615	1355	3,0	44
225/40ZR18	92W	8,0	635	235	7,8	630	1390	3,0	44



SIZE	LI/SI index	R.W. inch	O.D. mm	S.W. mm	N.S.D. mm	MAX LOAD kg	MAX LOAD lbs.	INFLATION bar	INFLATION psi
165/65R13	77T	5,0	542	172	7,6	412	910	2,5	36
165/60R13	77H	5,0	542	172	7,6	412	910	2,5	36
175/60R13	77H	5,0	538	178	7,9	412	910	2,5	36
185/70R13	86H	5,5	588	192	7,9	530	1170	2,5	36
165/60R14	75H	5,0	558	169	7,5	387	855	2,5	36
165/55R14	72H	5,0	538	163	6,4	355	780	2,5	36
175/80R14	88S	5,0	637	177	7,9	560	1235	2,4	35
175/70R14	84H	5,0	602	176	7,9	500	1102	2,5	36
175/65R14	82H	5,0	584	177	7,9	475	1050	2,5	36
185/80R14	91S	5,0	653	184	7,9	615	1355	2,4	35
185/70R14	88H	5,5	615	190	8,2	560	1235	2,5	36
185/65R14	86H	5,5	596	190	7,9	530	1170	2,5	36
195/70R14	91H	6,0	630	202	8,2	615	1355	2,5	36
205/70R14	95H	6,0	644	212	7,9	690	1520	2,5	36
205/60R14	88H	6,0	602	208	7,9	560	1235	2,5	36
185/65R15	88H	5,5	621	189	7,9	560	1235	2,5	36
185/60R15	84H	5,5	603	189	7,9	500	1100	2,5	36
185/55R15	82V	6,0	584	196	7,9	475	1050	2,5	36
195/60R15	88H	6,0	614	203	7,9	560	1235	2,5	36
195/55R15	85V	6,0	595	198	7,9	515	1135	2,5	36
195/50R15	82V	6,0	577	198	7,9	475	1047	2,5	36
205/70R15	96H	6,0	669	208	7,9	710	1565	2,5	36
205/60R15	91H	6,0	627	211	8,0	615	1355	2,5	36
225/70R15	100H	6,5	696	232	7,9	800	1765	2,5	36
205/55R16	91V	6,5	630	215	8,1	615	1355	2,5	36
215/60R16	95V	6,5	662	223	8,1	690	1520	2,5	36
225/60R16	98V	6,5	676	228	8,1	750	1655	2,5	36
225/55R16	95V	7,0	654	233	8,1	690	1520	2,5	36

NON DIRECTIONAL

IA-104



CITY



RAIN & WET



HANDLING



LOW NOISE



SAVE FUEL



SIZE	LI/SI index	R.W. inch	O.D. mm	S.W. mm	N.S.D. mm	MAX LOAD kg	MAX LOAD lbs.	INFLATION bar	INFLATION psi
165/80R13	83S	4,5	594	164	6,9	487	1075	2,4	35
165/70R13	79S	5,0	560	169	6,8	437	965	2,5	36
165/65R13	77S	5,0	544	167	6,9	412	908	2,5	36
175/70R13	82H	5,0	576	175	6,8	475	1045	2,5	36
175/60R13	77T	5,0	538	173	7,1	412	908	2,5	36
185/70R13	86H	5,5	592	188	7,4	530	1168	2,5	36
185/65R13	84H	5,5	571	187	7,3	500	1102	2,4	35
155/55R14	69H	5,0	529	160	6,4	325	717	2,5	36
165/60R14	75T	5,0	558	168	7,1	387	853	2,5	36
165/55R14	72H	5,0	538	163	6,4	355	780	2,5	36
175/70R14	84T	5,0	602	173	6,8	500	1102	2,5	36
175/65R14	82H	5,0	583	177	7,1	475	1047	2,5	36
185/70R14	88H	5,5	616	186	7,3	560	1235	2,5	36
185/65R14	86H	5,5	596	187	7,3	530	1170	2,5	36
185/60R14	82H	5,5	578	185	7,4	475	1045	2,5	36
195/70R14	91H	6,0	630	198	7,3	615	1355	2,5	36
205/70R14	95H	6,0	644	207	7,4	690	1521	2,5	36
185/65R15	88H	5,5	621	187	7,4	560	1235	2,5	36
185/60R15	84H	5,5	603	182	7,4	500	1100	2,5	36
185/55R15	82H	6,0	585	189	7,4	475	1047	2,5	36
195/65R15	91H	6,0	636	196	7,4	615	1356	2,5	36
195/60R15	88H	6,0	615	196	7,4	560	1235	2,5	36
195/55R15	85H	6,0	595	193	7,3	515	1135	2,5	36
195/50R15	82H	6,0	577	192	7,4	475	1047	2,5	36
205/70R15	96H	6,0	669	207	7,5	710	1565	2,5	36
205/65R15	94H	6,0	648	202	7,4	670	1477	2,5	36
205/60R15	91H	6,0	627	207	7,5	615	1355	2,5	36
225/70R15	100H	6,5	697	225	7,5	800	1765	2,5	36
195/60R16	89H	6,0	640	198	7,3	580	1279	2,5	36
195/55R16	87H	6,0	622	196	7,3	545	1202	2,5	36
205/65R16	95H	6,0	672	204	7,6	690	1521	2,5	36
205/55R16	91V	6,5	632	214	7,6	615	1356	2,5	36
215/65R16	98H	6,5	690	222	7,6	750	1653	2,5	36
215/60R16	95H	6,5	664	216	7,6	690	1521	2,5	36
225/70R16	103S	6,5	722	225	7,4	875	1929	2,5	36
215/60R17	96H	6,5	690	214	7,6	710	1565	2,5	36
215/55R18	95H	7,0	690	217	7,6	690	1521	2,5	36

NON DIRECTIONAL

IA-110



CITY



RAIN & WET



WEAR LIFE



COMFORT




LOW NOISE



SAVE FUEL

Ultra-High & High Performance

Sometimes speed and safety travel the same road. In our top range, high performance is guaranteed without sacrificing the full pleasure of a safe journey.

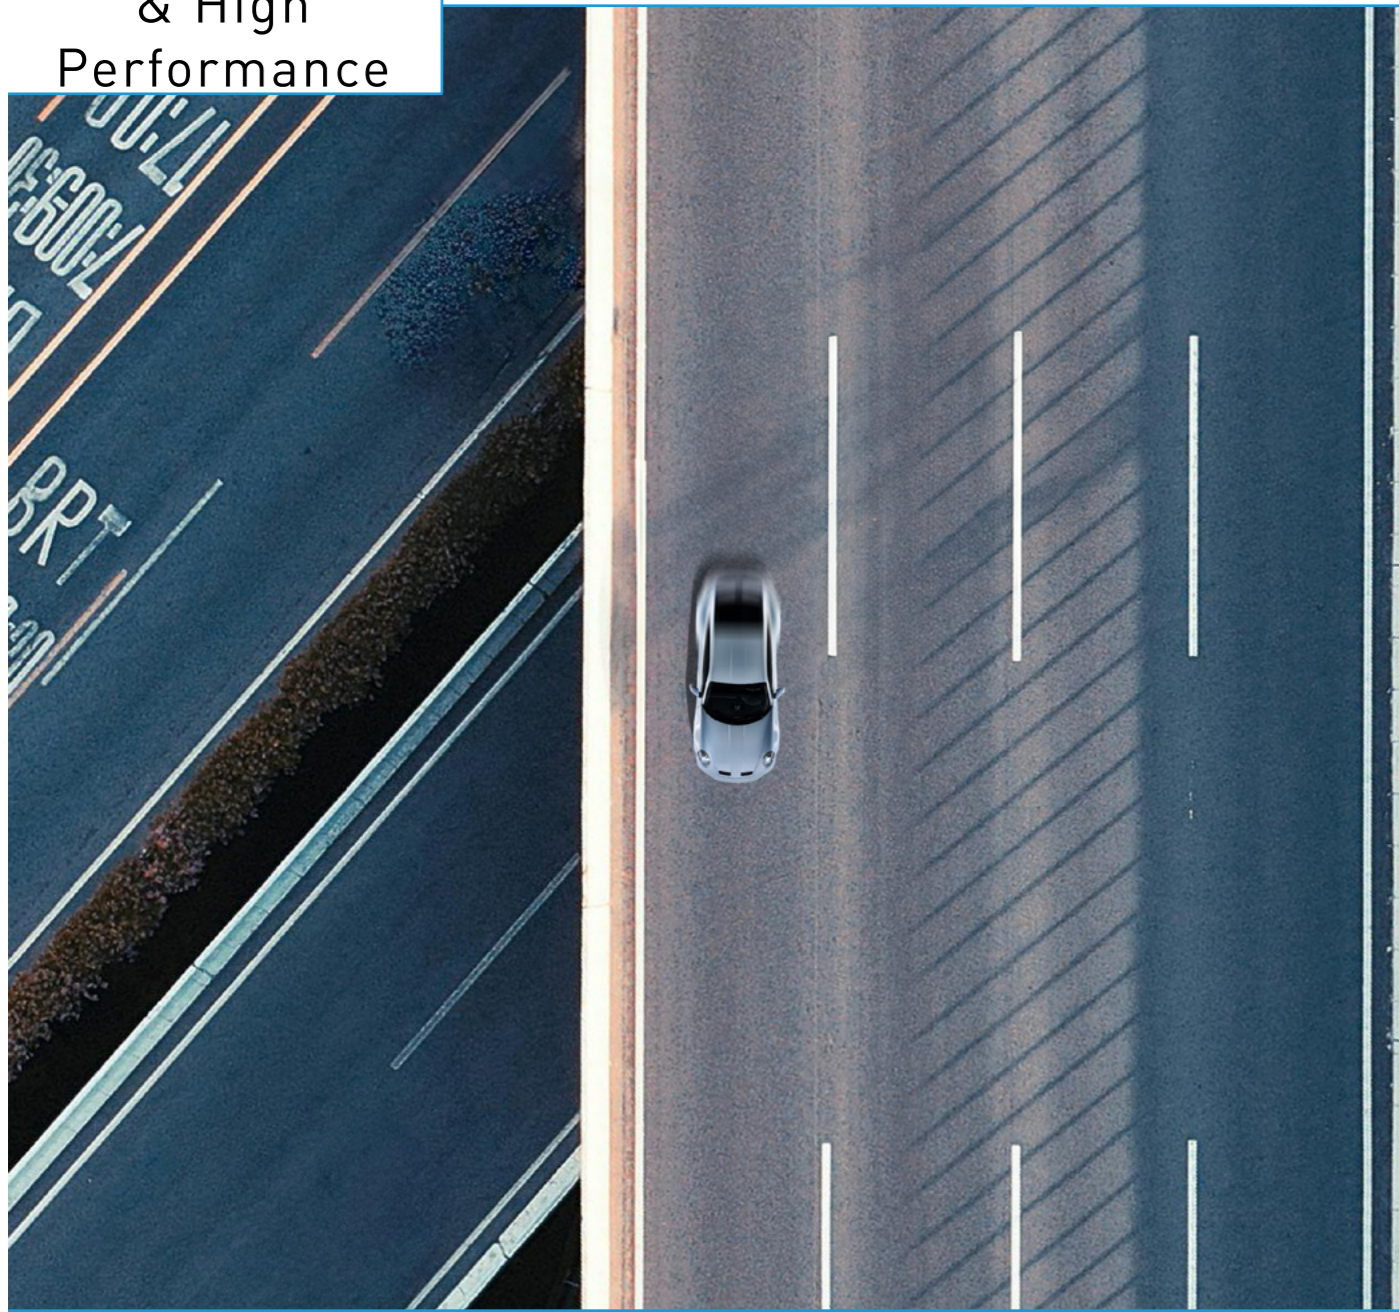

Nylon Chafer

To protect bead area while mounting/dismounting and other external damage.

Bead Wire

To maintain the contact between tire and the wheel rim.

Double Layers & Wide Steel Belts

Provide tire reinforcement and helps stabilize the tread. Also serves to protect the tire from impact and puncture.

Nylon Cap Ply

To protect steel belt and improve tire performance.

High Turn Up Polyester

To improve sidewall against puncture and better lateral stiffness.

Belt Edge Gum

To prevent separation between belts edge and increase durability.

Inner liner

Low air permeability compound for better air retention.

High Apex with High & Hardness Bead Filler

A triangular extruded profile that placed to the top of the bead wire will improve tire performance especially at high speed.



Velocità DTX

DIRECTIONAL IR-153		RACING	CITY	HIGH SPEED	RAIN & WET	HANDLING				
SIZE	LI/SI index	R.W. inch	O.D. mm	S.W. mm	N.S.D. mm	MAX LOAD kg	MAX LOAD lbs.	INFLATION bar	INFLATION psi	
195/50R15	82W	6,0	582	198	6,2	475	1047	2,5	36	
215/45ZR17 *	87W	7,0	626	213	6,4	545	1201	3,5	51	
235/45ZR17 *	94W	8,0	644	236	6,4	670	1477	3,5	51	
245/40ZR17 *	91W	8,5	629	248	6,4	615	1356	3,5	51	
255/35ZR18	94W XL	9,0	641	254	6,4	670	1477	3,4	50	
265/35ZR18	97W XL	9,5	651	266	6,4	730	1609	3,4	50	
285/35R18	101W XL	10,0	657	290	6,4	825	1819	3,4	50	

* Coming Soon



City Surfer

ASYMMETRICAL IA-181		CITY	WEAR LIFE	RAIN & WET	COMFORT	LOW NOISE	SAVE FUEL			
SIZE	LI/SI index	R.W. inch	O.D. mm	S.W. mm	N.S.D. mm	MAX LOAD kg	MAX LOAD lbs.	INFLATION bar	INFLATION psi	
225/65R17	102H	6,5	723	228	8,0	850	1875	2,5	36	



“Safety and stability is of utmost importance in the Velocità GN2’s development. This is delivered by its **asymmetrical tread pattern** with **T-shape sipes** and a centre groove that help **accelerate water dissipation**, thus reducing the risks of aquaplaning substantially. Wet performance is especially important in Malaysia where torrential rain is common, and given the Velocità GN2’s qualities, **it’s an ideal fit for passenger cars**. These traction-aig technologies are backed by the use of advanced rubber compounds which ensure that cornering performance and overall ride comfort are maintained even in dry conditions. The Velocità GN2 is a **versatile tyre for all seasons** which guarantees peace of mind with the brand’s **ISO 9001 certification**. Consumer size tests proved using Velocità GN2 tyres in 215/55 R17 size proved that they not only match but also **exceed benchmarks set by the industry’s more well-known names**. This was deduced after hard driving on Velocità GN2 tyres, a testament to their **dynamic abilities** as well as their **long-term quality**. The Velocità GN2 is also available in 15 to 20-inch-wheel sizes. And with the performance, safety, reliability and value for money it offers, it’s a choice you **won’t regret**.”

Technical Review

SIZE	LI/SI index	R.W. inch	O.D. mm	S.W. mm	N.S.D. mm	MAX LOAD kg	MAX LOAD lbs.	INFLATION bar	INFLATION psi
185/60R15	84H	5,5	603	182	7,2	500	1100	2,5	36
185/55R15	82V	6,0	588	191	7,2	475	1047	2,5	36
205/55R15	88V	6,5	612	214	8,0	560	1235	2,5	36
195/55R16	87V	6,0	622	196	7,3	545	1202	2,5	36
195/50R16	84V	6,0	606	198	7,0	500	1102	2,5	36
205/60R16	92V	6,0	652	209	8,0	630	1389	2,5	36
205/55R16	91V	6,5	633	213	8,0	615	1356	2,5	36
205/50R16	87V	6,5	614	212	8,0	545	1200	2,5	36
215/60R16	95V	6,5	664	219	8,0	690	1521	2,5	36
225/60R16	98V	6,5	676	225	8,0	750	1653	2,5	36
225/50R16	92V	7,0	633	230	8,0	630	1389	2,5	36
235/60R16	100V	7,0	691	240	8,0	800	1764	2,5	36
205/45ZR17	88W XL	7,0	615	206	8,0	560	1235	2,9	42
215/55R17	94V	7,0	668	229	8,0	670	1475	2,5	36
215/50R17	91V	7,0	648	228	8,0	615	1355	2,5	36
215/45ZR17	91W XL	7,0	629	212	8,0	615	1355	2,9	42
225/65R17	102 H	6,5	725	230	8,0	850	1875	2,5	36
225/60R17	99V	6,5	702	228	8,0	775	1710	2,5	36
225/55R17	97V	7,0	680	233	8,0	730	1610	2,5	36
225/50R17	94V	7,0	659	233	8,0	670	1475	2,5	36
225/45ZR17	94W XL	7,5	638	223	8,0	670	1475	3,0	44
235/55R17	99V	7,5	690	240	8,0	775	1709	2,5	36
235/45ZR17	97W XL	8,0	646	237	8,0	730	1610	3,0	44
245/45R17	99W XL	8,0	655	245	8,0	775	1710	2,9	42
225/55R18	98V	7,0	710	231	8,0	750	1653	2,5	36
225/50ZR18	95W	7,0	688	228	7,2	690	1521	2,5	36
225/45ZR18	95W XL	7,5	660	228	8,0	690	1520	3,0	44
225/40ZR18	92W XL	8,0	636	226	8,0	630	1390	2,9	42
235/50R18	97V	7,5	690	240	8,0	730	1609	2,5	36
235/45ZR18	98W XL	8,0	669	236	8,0	750	1653	2,9	42
235/40ZR18	95W XL	8,5	645	243	8,0	690	1520	3,0	44
245/50R18	100V	7,5	704	252	8,0	800	1765	2,5	36
245/45ZR18	100W XL	8,0	676	244	8,0	800	1765	3,0	44
245/40ZR18	97W XL	8,5	653	249	8,0	730	1610	3,0	44
275/45ZR18	103W	9,0	705	277	8,0	875	1929	2,5	36
235/35ZR19	91W XL	8,5	650	233	8,0	615	1356	2,9	42
245/45ZR19	102W XL	8,0	707	243	8,0	850	1875	2,9	42
245/40ZR19	98W XL	8,5	680	245	8,0	750	1655	2,9	42
245/35ZR19	93W XL	8,5	657	247	8,0	650	1433	2,9	42
275/40ZR19	105W XL	9,5	705	275	8,0	925	2040	2,9	42
245/45ZR20	103 W XL	8,0	730	240	8,0	875	1929	2,9	42
245/40ZR20	99W XL	8,5	711	239	8,0	775	1710	2,9	42
245/35ZR20	95W XL	8,5	681	245	8,0	690	1520	2,9	42
275/35ZR20	102W XL	9,5	706	276	8,0	850	1874	2,9	42

ASYMMETRICAL

IA-182



HIGH SPEED



RAIN & WET



WEAR LIFE



HANDLING



LOW NOISE










SAVE FUEL








Evoraze



Velostrada



ASYMMETRICAL IA-183									
 CITY  HIGH SPEED  WEAR LIFE  RAIN & WET  HANDLING  LOW NOISE  SAVE FUEL									
SIZE	LI/SI index	R.W. inch	O.D. mm	S.W. mm	N.S.D. mm	MAX LOAD kg	MAX LOAD lbs.	INFLATION bar	INFLATION psi
195/55R15	85W	6,0	597	196	7,3	515	1135	2,5	36
195/50R15	82W	6,0	580	194	7,3	475	1047	2,5	36
205/50R15	86W	6,5	593	207	7,3	530	1168	2,5	36
195/50R16	84W	6,0	606	194	7,0	500	1102	2,5	36
205/45ZR17	88W XL	7,0	618	202	7,8	560	1235	2,9	42
215/45ZR17	91W XL	7,0	626	212	7,8	615	1356	2,9	42
225/45ZR18	95W XL	7,5	660	225	7,8	690	1521	2,9	42

ASYMMETRICAL IA-185									
 CITY  HIGH SPEED  WEAR LIFE  RAIN & WET  HANDLING  LOW NOISE  SAVE FUEL									
SIZE	LI/SI index	R.W. inch	O.D. mm	S.W. mm	N.S.D. mm	MAX LOAD kg	MAX LOAD lbs.	INFLATION bar	INFLATION psi
185/55R16	83V	6,0	613	191	7,3	487	1074	2,5	36
215/45ZR17	91W XL	7,0	629	212	8,0	615	1356	2,9	42
225/65R17	102H	6,5	724	228	8,0	850	1875	2,5	36
225/60R17	99V	6,5	702	224	8,0	775	1709	2,5	36
225/50R17	94V	7,0	661	227	8,0	670	1477	2,5	36
225/45ZR17	94W XL	7,5	634	223	8,0	670	1477	2,9	42
225/45ZR18	95W XL	7,5	660	228	8,0	690	1521	3,0	44
225/40ZR18	92W XL	8,0	636	224	8,0	630	1389	2,9	42
235/55R18	100V	7,5	715	241	8,0	800	1764	2,5	36
245/45ZR18	100W XL	8,0	680	240	8,0	800	1765	2,9	42
245/40ZR19	98W XL	8,5	680	245	8,0	750	1655	2,9	42
245/45ZR20	103W XL	8,0	730	240	8,0	875	1929	2,9	42
245/35ZR20	95W XL	8,5	681	245	8,0	690	1520	2,9	42

Rally

When the power is not enough you need some extra traction. Boost your truck with Pro Rally and its tread pattern especially designed to snub the mud and your opponents.



RALLY



Pro Rally

NON-DIRECTIONAL FOR RALLY

IA-103



RALLY



RAIN & WET



HANDLING

SIZE	LI/SI index	R.W. Inch	O.D. mm	S.W. mm	N.S.D. mm	MAX LOAD kg	MAX LOAD lbs.	INFLATION bar	INFLATION psi
175/70R14	84S	5,0	604	173	10,0	500	1100	2,5	36



Pro Rally

DIRECTIONAL FOR RALLY

IA-107



RALLY



RAIN & WET



HANDLING

SIZE	LI/SI index	R.W. inch	O.D. mm	S.W. mm	N.S.D. mm	MAX LOAD kg	MAX LOAD lbs.	INFLATION bar	INFLATION psi
185/65R14	86S	5,5	602	183	10,9	530	1170	2,5	36
175/65R15	84S	5,0	611	170	10,9	500	1102	2,5	36
205/65R15	96S	6,0	649	204	10,9	710	1565	3,0	44

Highway Terrain

Why compromise when you can enjoy premium safety, comfort, efficiency and performance in bad weather?



Evoraze Max

DIRECTIONAL
IA-152



S2WR2
READY

SIZE	LI/SI index	R.W. inch	O.D. mm	S.W. mm	N.S.D. mm	MAX LOAD kg	MAX LOAD lbs.	INFLATION bar	INFLATION psi
265/60R18	114V XL	8,0	775	272	8,0	1180	2601	3,4	50
265/50R20	111V XL	8,5	776	270	8,0	1090	2403	3,4	50



Evotrac ST

NON DIRECTIONAL
IT/KT-202



SIZE	LI/SI index	R.W. inch	O.D. mm	S.W. mm	N.S.D. mm	MAX LOAD kg	MAX LOAD lbs.	INFLATION bar	INFLATION psi
255/70R15C	112/110T	7,5	739	257	9,0	1120 (single) 1060 (dual)	2469 (single) 2337 (dual)	3,75	54
275/70R16	114T	8,0	792	280	10,0	1180	2600	3,5	51



Evotrac XT

NON DIRECTIONAL

IT-203



TOURING



RAIN & WET



WEAR LIFE



COMFORT

SIZE	LI/SI index	R.W. inch	O.D. mm	S.W. mm	N.S.D. mm	MAX LOAD kg	MAX LOAD lbs.	INFLATION bar	INFLATION psi
265/70R17	113S	8,0	804	275	10,0	1150	2535	3,5	51
265/65R17	112T	8,0	776	272	10,0	1120	2470	3,5	51
275/65R17	115T	8,0	790	274	9,3	1215	2680	3,5	51
285/65R17	116T	8,5	802	292	10,0	1250	2756	3,5	51

SW TYPE: Outline White Letters / Outline Black Letters



Evoranger

NON DIRECTIONAL

IT-206



TOURING



RAIN & WET



WEAR LIFE



COMFORT



LOW NOISE




SAVE FUEL

SIZE	LI/SI index	R.W. inch	O.D. mm	S.W. mm	N.S.D. mm	MAX LOAD kg	MAX LOAD lbs.	INFLATION bar	INFLATION psi
265/70R16	111T	8,0	778	272	9,5	1090	2403	3,5	51
235/60R18	103H	7,0	742	232	9,2	875	1929	3,5	51
245/65R17	105T	7,0	750	246	9,5	925	2039	3,5	51
265/65R18	114T	8,0	801	272	9,5	1180	2601	3,5	51
265/50R20	111H XL	8,5	774	275	9,5	1090	2403	3,4	50
275/55R20	111H	8,5	810	282	9,5	1090	2403	3,5	51
275/50R20	109H	8,5	784	279	9,5	1030	2271	3,5	51
285/50R20	111H	9,0	795	293	9,5	1090	2403	3,5	51
285/45R22	110H	9,5	821	285	9,5	1060	2337	3,5	51

All Terrain

Adjust seat and mirrors, fasten your seat belt and free your engines roar.
This range has been developed to let you enjoy the pleasure of a comfortable ride while the tires are focused on ensuring long lasting safety.

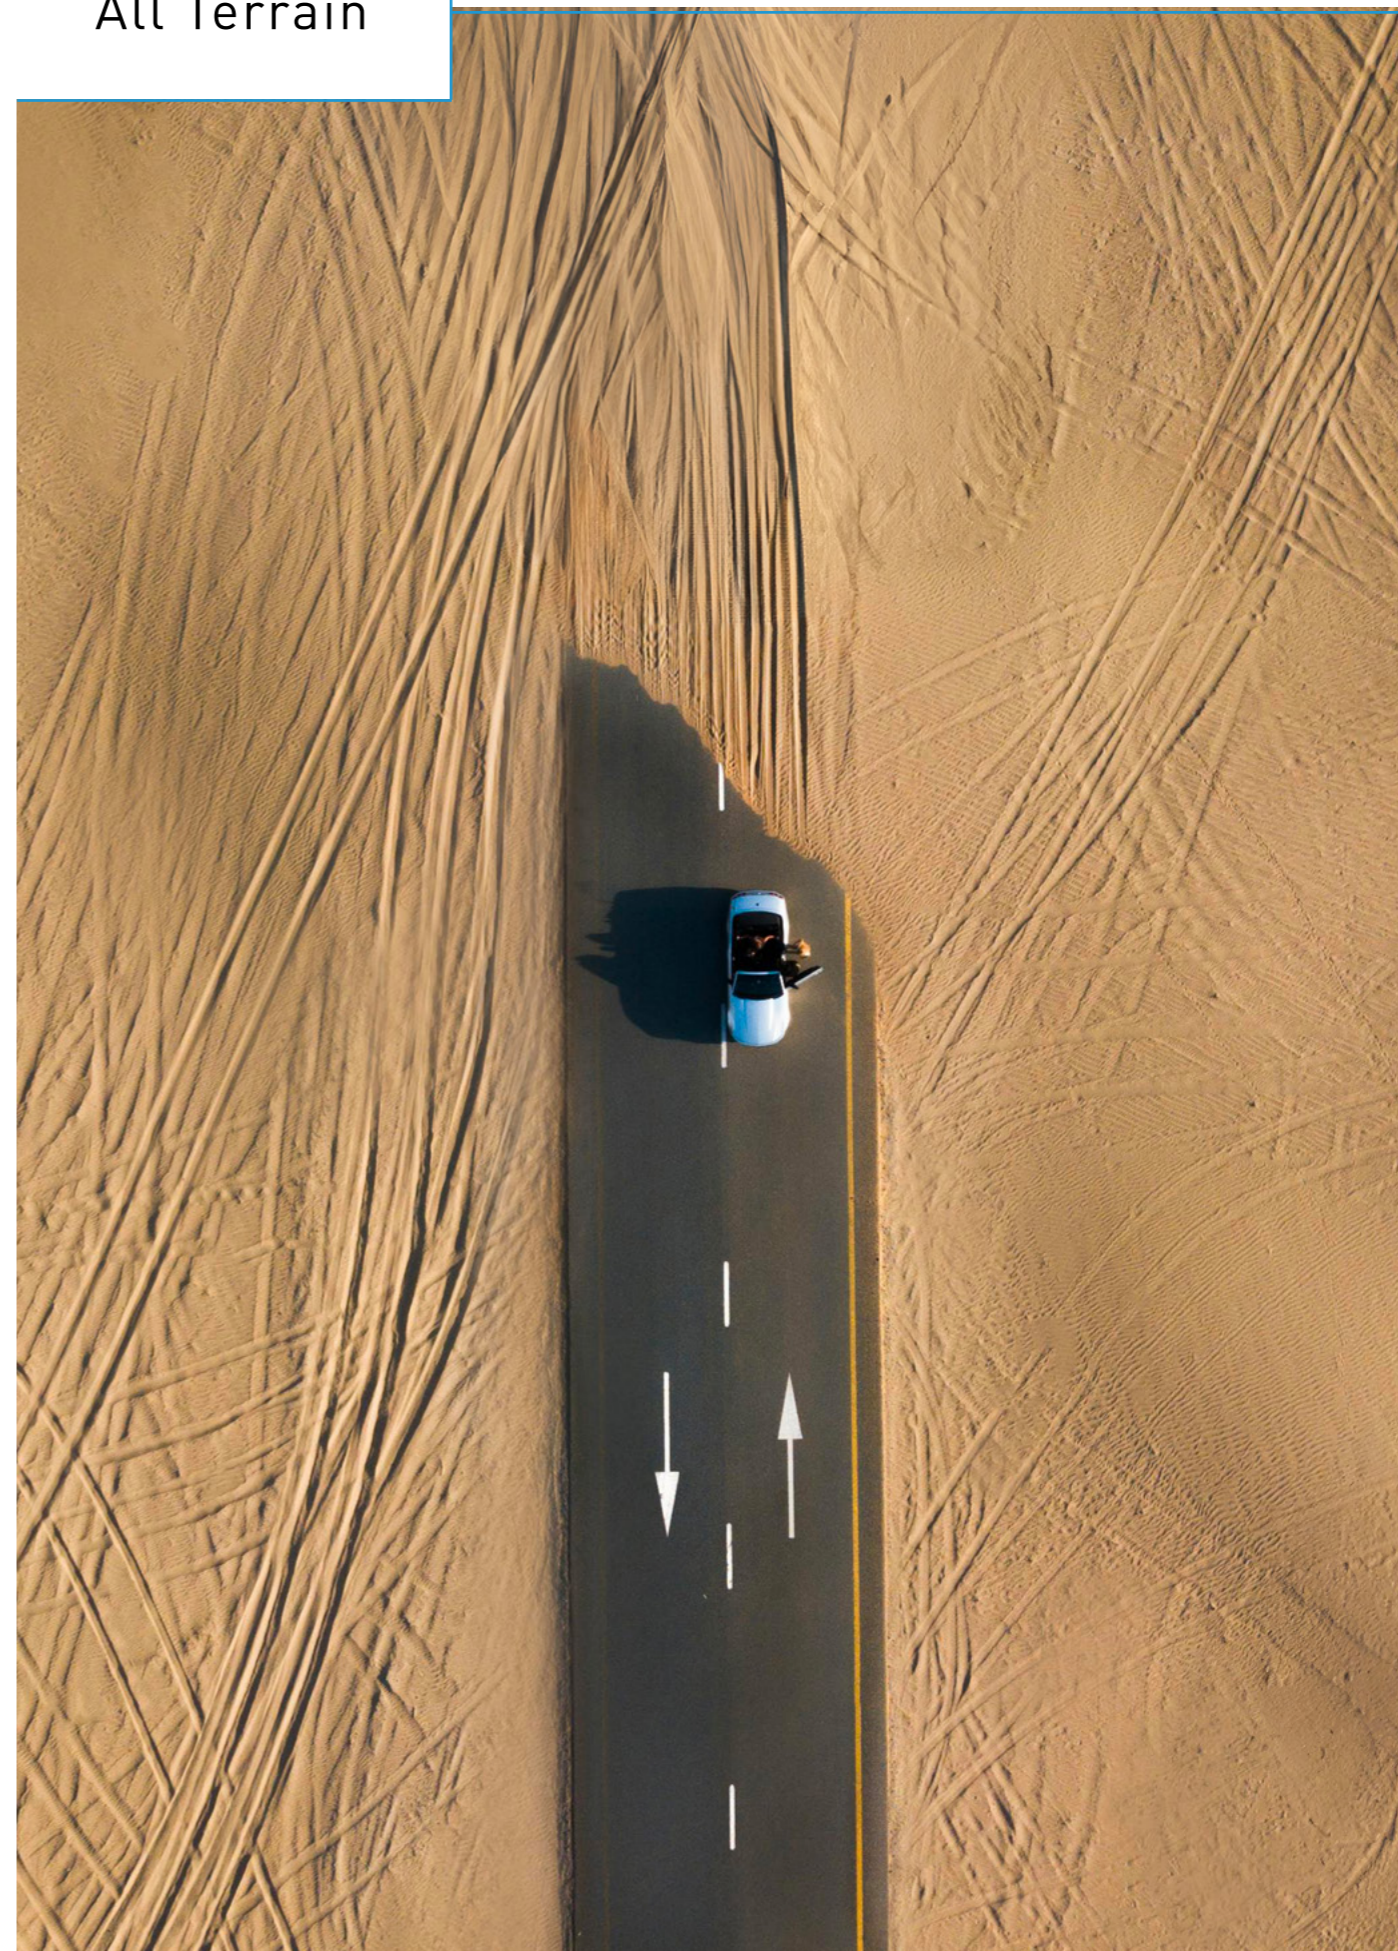

Terra Raider A/TX



NON DIRECTIONAL KU-257		TOURING				OFF-ROAD		RAIN & WET		DURABILITY		3PMSF		
		SIZE	LI/SI index	P.R.	R.W. inch	O.D. mm	S.W. mm	N.S.D. mm	MAX LOAD				INFLATION	
									SINGLE		DOUBLE		bar	psi
kg	lbs.	kg	lbs.											
LT235/75R15	104/101Q	6	6,5	739	227	12,8	900	1985	825	1820	3,5	50		
31x10.50R15LT	109Q	6	8,5	781	271	14,0	1030	2270	-	-	3,5	50		
LT235/85R16	120/116Q	10	6,5	811	234	12,8	1380	3042	1260	2778	5,5	80		
LT245/75R16	120/116Q	10	7,0	781	242	12,8	1380	3042	1260	2778	5,5	80		
LT265/75R16	123/120Q	10	7,5	810	266	14,3	1550	3415	1400	3085	5,5	80		
LT285/75R16	126/123Q	10	8,0	836	292	14,3	1700	3750	1550	3415	5,5	80		
245/65R17	111T XL	-	7,0	754	246	10,6	1090	2403	-	-	3,4	50		
LT235/80R17	120/117Q	10	6,5	812	231	12,8	1400	3085	1285	2835	5,5	80		
LT245/75R17	121/118Q	10	7,0	803	249	14,3	1450	3195	1320	2910	5,5	80		
LT265/70R17	121/118Q	10	8,0	807	268	14,3	1450	3195	1320	2910	5,5	80		
LT285/70R17	123/120Q	10	8,5	838	290	14,3	1550	3415	1400	3085	5,5	80		
33x12.50R17LT	120Q	10	10,0	830	325	14,3	1400	3085	-	-	4,5	65		
35x12.50R17LT	121Q	10	10,0	880	324	14,3	1450	3195	-	-	4,5	65		
37x12.50R17LT	124Q	10	10,0	934	338	14,3	1600	3525	-	-	4,5	65		
265/60R18	114T XL	-	8,0	779	270	10,6	1180	2601	-	-	3,4	50		
LT265/70R18	124/121Q	10	8,0	832	270	14,3	1600	3525	1450	3195	5,5	80		
LT275/70R18	125/122Q	10	8,0	847	275	14,3	1650	3640	1500	3305	5,5	80		
LT275/65R18	123/120Q	10	8,0	817	277	14,3	1550	3415	1400	3085	5,5	80		
LT285/70R18	127/124Q	10	8,5	859	288	14,3	1750	3860	1600	3525	5,5	80		
LT285/65R18	125/122Q	10	8,5	837	288	14,3	1650	3640	1500	3305	5,5	80		
LT325/65R18	121/118Q	8	9,5	882	331	14,1	1450	3195	1320	2910	3,5	50		
LT325/65R18	127/124Q	10	9,5	882	339	14,3	1750	3860	1600	3525	4,5	65		
33x12.50R18LT	122Q	12	10,0	828	321	14,3	1500	3305	-	-	5,5	80		
33x12.50R18LT	123Q	10	10,0	880	318	14,3	1550	3415	-	-	4,5	65		
35X12.50R18LT	123Q	10	10,0	880	318	14,3	1550	3415	-	-	4,5	65		
35X12.50R18LT	128Q	12	10,0	880	318	14,3	1800	3970	-	-	5,5	80		
37X12.50R18LT	128Q	10	10,0	935	332	14,3	1800	3970	-	-	4,5	65		
LT265/60R20	121/118Q	10	8,0	832	266	14,3	1450	3195	1320	2910	5,5	80		
LT275/65R20	126/123Q	10	8,0	872	275	14,3	1700	3750	1550	3415	5,5	80		
LT275/60R20	123/120Q	10	8,0	845	272	14,3	1550	3415	1400	3085	5,5	80		
LT275/55R20	120/117Q	10	8,5	820	270	14,3	1400	3085	1285	2835	5,5	80		
LT285/60R20	125/122Q	10	8,5	858	285	14,3	1650	3640	1500	3305	5,5	80		
LT285/55R20	122/119Q	10	9,0	831	289	14,3	1500	3305	1360	3000	5,5	80		
LT285/50R20	119/116Q	10	9,0	802	287	14,3	1360	3000	1250	2755	5,5	80		
LT305/55R20	121/118Q	10	9,5	847	310	14,3	1450	3195	1320	2910	4,5	65		
33x12.50R20LT	114Q	10	10,0	830	315	14,3	1180	2600	-	-	4,5	65		
33x12.50R20LT	119Q	12	10,0	830	315	14,3	1360	3000	-	-	5,5	80		
35X12.50R20LT	121Q	10	10,0	880	316	14,3	1450	3195	-	-	4,5	65		
35X12.50R20LT	125Q	12	10,0	880	316	14,3	1650	3640	-	-	5,5	80		
37X12.50R20LT	126Q	10	10,0	935	320	14,3	1700	3750	-	-	4,5	65		
285/45R22	114T XL	-	9,5	821	285	10,6	1180	2601	-	-	3,4	50		
35x12.50R22LT	117Q	10	10,0	882	315	14,3	1285	2835	-	-	4,5	65		
35x12.50R22LT	121Q	12	10,0	882	315	14,3	1450	3195	-	-	5,5	80		



Terra Roamer A/T

NON DIRECTIONAL

IA-201



TOURING



RAIN & WET



WEAR LIFE

SIZE	LI/SI index	R.W. inch	O.D. mm	S.W. mm	N.S.D. mm	MAX LOAD kg	MAX LOAD lbs.	INFLATION bar	INFLATION psi
235/70R15	103S	7,0	710	235	10,2	875	1930	2,5	36



Terra Roamer A/T Plus

NON DIRECTIONAL

IA-204



TOURING



RAIN & WET



WEAR LIFE

SIZE	LI/SI index	R.W. inch	O.D. mm	S.W. mm	N.S.D. mm	MAX LOAD kg	MAX LOAD lbs.	INFLATION bar	INFLATION psi
245/70R16	111T XL	7,0	750	250	10,8	1090	2403	2,9	42

SW TYPE: Outline White Letters / Outline Black Letters

Terra Cruiser



NON DIRECTIONAL

IA-205



TOURING



RAIN & WET



WEAR LIFE

SIZE	LI/SI index	R.W. inch	O.D. mm	S.W. mm	N.S.D. mm	MAX LOAD kg	MAX LOAD lbs.	INFLATION bar	INFLATION psi
185/70R14	88S	5,5	616	190	10,0	560	1235	2,5	36
195/70R14	91S	6,0	629	203	10,0	615	1356	2,5	36
195/65R15	91S	6,0	635	200	10,0	615	1356	2,5	36
195/65R15	95S XL	6,0	635	200	10,0	690	1521	2,9	42
205/70R15	96S	6,0	670	210	10,0	710	1565	2,5	36
205/70R15	100S XL	6,0	670	210	10,0	800	1764	2,9	42
235/75R15	105S	6,5	733	237	11,0	925	2040	2,5	36
235/75R15	109S XL	6,5	733	237	11,0	1030	2270	2,9	42


SW TYPE: Outline White Letters / Outline Black Letters

Terra Frontier



Mud Terrain

When the road gets messy and the asphalt turns into dirt there . It is not about good or bad weather, it is only a matter of good or bad equipment. Be prepared!

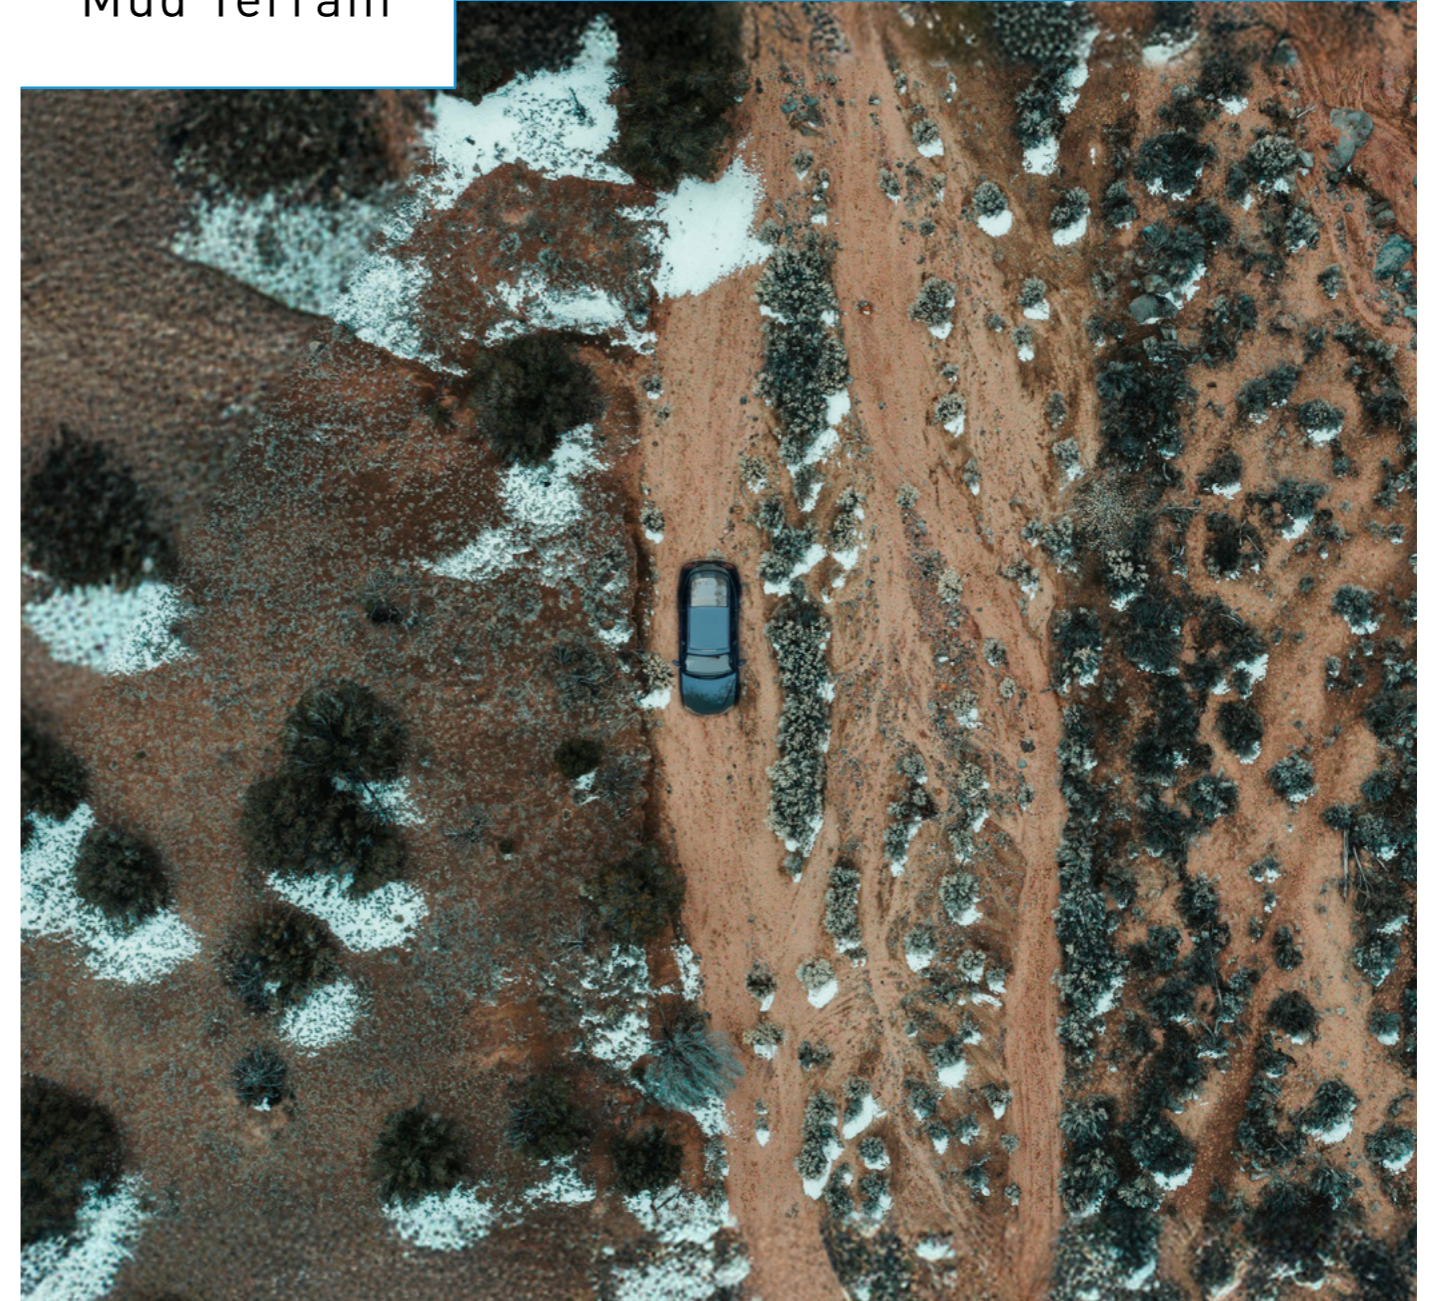

NON DIRECTIONAL IA/KA-207



TOURING



RAIN & WET



DURABILITY



HANDLING

SIZE	LI/SI index	R.W. inch	O.D. mm	S.W. mm	N.S.D. mm	MAX LOAD kg	MAX LOAD lbs.	INFLATION bar	INFLATION psi
31x10.5 R15LT 6PR	109Q	8,5	778	281	10,5	1030	2270	3,4	50
32x11.5 R15LT 6PR	113Q	9,0	800	293	10,6	1150	2535	3,4	50
235/60R16	100T	7,0	688	235	9,8	800	1764	2,5	36
245/70 R16	111TXL	7,0	750	245	10,6	1090	2403	3,4	50
265/70 R16	116TXL	8,0	779	276	10,5	1250	2756	3,4	50
265/65 R17	116TXL	8,0	780	274	10,5	1250	2756	3,4	50
285/65 R17	120TXL	8,5	802	292	10,6	1400	3086	3,4	50
265/60 R18	114TXL	8,0	779	270	10,5	1180	2601	3,4	50
285/60 R18	120TXL	8,5	800	290	10,5	1400	3086	3,4	50
265/50 R20	112TXL	8,5	778	270	10,5	1120	2469	3,4	50
275/55R20	117TXL	8,5	813	277	10,6	1285	2833	3,4	50
275/45R20	110HXL	9,0	760	269	10,6	1060	2337	3,4	50
285/50 R20	116TXL	9,0	802	286	10,5	1250	2756	3,4	50

SW TYPE: RWL / RBL/ OSBL, For 20" available only OSBL



Double Polyester Body Plies

Excellent strength and durability yet provide comfort ride characteristic.

Nylon Chafer

To protect bead area while mounting/dismounting and other external damage.

Bead Wire

To provide reinforcement and maintain proper grip of the tire on the rim.

Stronger Steel Belts

Stabilize tread area, provide longer tread life, better steering control and lower rolling resistance.

Nylon Cap Ply Jointless Full Breaker

To protect steel belt and improve tire performance

Double Layers Belt Edge Gum

To prevent separation between belts edge and increase durability.

SECOND BELT
FIRST BELT
Double Layers Belt Edge Gum

Inner Liner

Low air permeability compound serves the similar function as an innertube to hold high pressure air inside.

Special Reinforced Bead Filler Compound

Terra Ranger



NON DIRECTIONAL

KU-251



OFF-ROAD

RAIN & WET

DURABILITY

SIZE	LI/SI index	P.R.	R.W. inch	O.D. mm	S.W. mm	N.S.D. mm	MAX LOAD				INFLATION	
							SINGLE		DOUBLE		bar	psi
							kg	lbs.	kg	lbs.		
26x7.50R13LT	92Q	6	6,0	654	190	13,8	630	1390	-	-	3,5	50
26x7.50R13LT	97Q	6 HD	6,0	654	190	13,8	730	1610	-	-	4,5	65
27x8.50R14LT	95Q	6	7,0	680	228	14,0	690	1520	-	-	3,5	50
30x10.50R15LT (LT265/70R15)	106Q	6	8,5	762	276	13,8	950	2095	-	-	3,5	50
31x10.50R15LT	109Q	6	8,5	780	283	14,4	1030	2270	-	-	3,5	50
LT265/75R16	112/109Q	6	7,5	810	273	14,3	1120	2470	1030	2270	3,5	50

SW TYPE: Outline White Letters / Outline Black Letters

Terra Warrior M/T



NON DIRECTIONAL

KU-253



OFF-ROAD

RAIN & WET

DURABILITY

SIZE	LI/SI index	P.R.	R.W. inch	O.D. mm	S.W. mm	N.S.D. mm	MAX LOAD				INFLATION	
							SINGLE		DOUBLE		bar	psi
							kg	lbs.	kg	lbs.		
27x8.50R14LT	95Q	6	7,0	680	228	14,0	690	1520	-	-	3,5	50
LT235/75R15	96/93Q	4	6,5	739	230	14,1	710	1530	645	1390	2,5	35
LT235/75R15	104/101Q	6	6,5	739	230	14,1	900	1985	825	1820	3,5	50
31x10.50R15LT	109Q	6	8,5	781	281	14,4	1030	2270	-	-	3,5	50
33x12.50R15LT	108Q	6	10,0	832	321	14,4	1000	2205	-	-	2,5	35
LT245/75R16	108/104Q	6	7,0	783	250	14,4	1000	2205	910	2005	3,5	50
LT245/75R16	120/116Q	10	7,0	782	250	14,4	1380	3042	1260	2778	5,5	80
LT265/75R16	112/109Q	6	7,5	810	271	14,4	1120	2470	1030	2270	3,5	50
LT305/70R16	124/121Q	10	9,0	840	314	14,3	1600	3525	1450	3195	4,5	65
LT225/70R17	110/107Q	8	6,5	758	219	14,0	1060	2335	975	2150	4,5	65
LT265/70R17	121/118Q	10	8,0	811	272	14,4	1450	3195	1320	2910	5,5	80
LT265/65R17	120/117Q	10	8,0	781	272	14,4	1400	3085	1285	2835	5,5	80
33x12.50R20LT	114Q	10	10,0	829	320	14,4	1180	2600	-	-	4,5	65

SW TYPE: Outline White Letters / Outline Black Letters



SIZE	LI/SI index	P.R.	R.W. inch	O.D. mm	S.W. mm	N.S.D. mm	MAX LOAD				INFLATION	
							SINGLE		DOUBLE		bar	psi
							kg	lbs.	kg	lbs.		
LT245/75R16	120/116Q	10	7,0	782	248	14,3	1380	3042	1260	2778	5,5	80
LT265/75R16	112/109Q	6	7,5	810	273	14,6	1120	2470	1030	2270	3,5	50
LT265/75R16	123/120Q	10	7,5	810	273	14,3	1550	3415	1400	3085	5,5	80
LT245/75R17	121/118Q	10	7,0	807	245	14,4	1450	3195	1320	2910	5,5	80
LT265/70R17	121/118Q	10	8,0	810	272	14,4	1450	3195	1320	2910	5,5	80
LT265/65R17	116/113Q	8	8,0	777	272	13,5	1250	2755	1150	2535	4,5	65
LT265/65R17	120/117Q	10	8,0	777	272	13,5	1400	3085	1285	2835	5,5	80
LT285/70R17	123/120Q	10	8,5	836	293	14,5	1550	3415	1400	3085	5,5	80
33x12.50R17LT	120Q	10	10,0	829	321	14,4	1400	3085	-	-	4,5	65
35x12.50R17LT	121Q	10	10,0	883	329	14,4	1450	3195	-	-	4,5	65
37x12.50R17LT	124Q	10	10,0	934	317	14,4	1600	3525	-	-	4,5	65
LT265/70R18	124/121Q	10	8,0	832	272	14,4	1600	3525	1450	3195	5,5	80
LT265/60R18	114/110Q	8	8,0	782	264	13,5	1180	2600	1060	2335	4,5	65
LT265/60R18	119/116Q	10	8,0	782	264	13,5	1360	3000	1250	2755	5,5	80
LT275/70R18	125/122Q	10	8,0	847	277	14,3	1650	3640	1500	3305	5,5	80
LT275/65R18	123/120Q	10	8,0	820	277	14,3	1550	3415	1400	3085	5,5	80
33x12.50R18LT	118Q	10	10,0	830	318	14,4	1320	2910	-	-	4,5	65
35x12.50R18LT	123Q	10	10,0	884	320	14,4	1550	3415	-	-	4,5	65
35x12.50R18LT	128Q	12	10,0	884	320	14,4	1800	3970	-	-	5,5	80
37x12.50R18LT	128Q	10	10,0	936	328	14,4	1800	3970	-	-	4,5	65
LT265/50R20	112Q XL	-	8,5	782	265	13,5	1120	2469	-	-	3,4	50
LT265/60R20	121/118Q	10	8,0	833	269	14,4	1450	3195	1320	2910	5,5	80
LT275/65R20	126/123Q	10	8,0	870	280	14,3	1700	3750	1550	3415	5,5	80
LT275/60R20	123/120Q	10	8,0	837	278	14,4	1550	3415	1400	3085	5,5	80
LT285/55R20	122/119Q	10	9,0	833	289	14,4	1500	3305	1360	3000	5,5	80
LT285/50R20	119/116Q	10	9,0	807	288	14,4	1360	3000	1250	2755	5,5	80
33x12.50R20LT	114Q	10	10,0	834	319	14,4	1180	2600	-	-	4,5	65
35x12.50R20LT	121Q	10	10,0	880	318	14,4	1450	3195	-	-	4,5	65
37x12.50R20LT	126Q	10	14,4	935	322	14,4	1700	3750	-	-	4,5	65
37x13.50R20LT	127Q	10	11,0	934	345	14,4	1750	3860	-	-	4,5	65
37x13.50R20LT	128Q	12	11,0	934	345	14,3	1800	3970	-	-	5,5	80
33x12.50R22LT	109Q	10	10,0	835	318	14,4	1030	2270	-	-	4,5	65
35x12.50R22LT	117Q	10	10,0	882	313	14,4	1285	2835	-	-	4,5	65
35x12.50R22LT	121Q	12	10,0	882	313	14,4	1450	3195	-	-	5,5	80
37x12.50R22LT	123Q	10	10,0	934	318	14,4	1550	3415	-	-	4,5	65
37x12.50R22LT	127Q	12	10,0	934	318	14,4	1750	3860	-	-	5,5	80
37x12.50R22LT	128Q	12	11,0	938	340	14,3	1800	3970	-	-	5,5	80
37x13.50R22LT	123Q	10	11,0	934	340	14,3	1550	3415	-	-	4,5	65

NON DIRECTIONAL

KU-255



OFF-ROAD



RAIN & WET



DURABILITY



HANDLING



Terra Xtreme

DIRECTIONAL

SK-891



OFF-ROAD



RAIN & WET



DURABILITY

SIZE	LI/SI index	P.R.	R.W. inch	O.D. mm	S.W. mm	N.S.D. mm	MAX LOAD		INFLATION	
							SINGLE		bar	psi
							kg	lbs.		
31x10.50-15LT	109N	6	8,5	815	272	21,0	1030	2270	3,1	45
33x10.50-15LT	114M	6	8,5	855	278	22,0	1180	2600	3,1	45
35x10.50-15LT	120L	6	8,5	895	295	24,5	1400	3085	3,1	45
35x10.50-16LT	119L	6	8,5	900	286	24,5	1360	2998	3,1	45
37x12.50-16LT	113L	6	9,0	955	324	24,5	1150	2535	2,1	30
37x12.50-17LT	116L	6	9,0	959	327	24,5	1250	2755	2,1	30
37x12.50-17LT	124L	10	9,0	967	325	24,5	1600	3525	4,1	60



Terra Mania

DIRECTIONAL

SK-893



OFF-ROAD



RAIN & WET



DURABILITY

SIZE	LI/SI index	P.R.	R.W. inch	O.D. mm	S.W. mm	N.S.D. mm	MAX LOAD		INFLATION	
							SINGLE		bar	psi
							kg	lbs.		
31X10.5-15 LT	109 N	6	8,5	786	261	18,7	1030	2270	3,1	45
33X10.5-15 LT	114M	6	8,5	845	273	20,2	1180	2600	3,1	45
33X13.5-15 LT	109L	6	10,0	832	336	20,5	1030	2270	2,1	30
35X10.5-15 LT	120L	6	8,5	883	287	20,2	1400	3085	3,1	45
35X10.5-16 LT	119L	6	8,5	885	281	20,2	1360	2998	3,1	45

Commercial

Traffic and weather conditions are not a problem anymore. Thanks to the high standards of durability and maneuverability every product in this range is the solution for any daily routine.





Power Trouper

NON DIRECTIONAL

KR-106



CITY



WEAR LIFE



DURABILITY

SIZE	LI/SI index	P.R.	R.W. inch	O.D. mm	S.W. mm	N.S.D. mm	MAX LOAD				INFLATION	
							SINGLE		DOUBLE		bar	psi
							kg	lbs.	kg	lbs.		
195R15C	103/101R	6	5,5	694	200	8,2	875	1930	825	1820	3,75	55
195R15C	106/104R	8	5,5	694	200	8,2	950	2095	900	1985	4,5	65



Power Cruiser

NON DIRECTIONAL

KA-104



CITY



WEAR LIFE



DURABILITY

SIZE	LI/SI index	P.R.	R.W. inch	O.D. mm	S.W. mm	N.S.D. mm	MAX LOAD				INFLATION	
							SINGLE		DOUBLE		bar	psi
							kg	lbs.	kg	lbs.		
6.50R14C	102/100P	8	5,0	696	187	9,8	850	1875	800	1765	4,5	65



Power Trekker

NON DIRECTIONAL

KA-105



CITY



WEAR LIFE



DURABILITY

SIZE	LI/SI index	P.R.	R.W. inch	O.D. mm	S.W. mm	N.S.D. mm	MAX LOAD				INFLATION	
							SINGLE		DOUBLE		bar	psi
							kg	lbs.	kg	lbs.		
6.50R14C	102/100P	8	5,0	696	187	9,8	850	1875	800	1765	4,5	65
195R14C	106/104P	8	5,5	679	204	9,2	950	2095	900	1985	4,5	65
195/85R15LT	113/111L	-	5,5	710	195	8,6	1150	2535	1090	2405	6,0	87
215/70R15C	109/107R	8	6,5	683	220	10,2	1030	2270	975	2150	4,5	65
225/70R15C	112/110R	8	6,5	698	228	10,2	1120	2470	1060	2335	4,5	65
195/85R16LT	114/112L	-	5,5	737	193	8,6	1180	2600	1120	2470	6,0	87
215/70R16C	108/106T	6	6,5	708	221	10,0	1000	2205	950	2095	3,75	55



Power Ranger

NON DIRECTIONAL

KA-103



CITY



WEAR LIFE



DURABILITY

SIZE	LI/SI index	P.R.	R.W. inch	O.D. mm	S.W. mm	N.S.D. mm	MAX LOAD				INFLATION	
							SINGLE		DOUBLE		bar	psi
							kg	lbs.	kg	lbs.		
195R14C	106/104N	8	5,5	668	200	9,9	950	2095	900	1985	4,5	65
215/70R15C	109/107R	8	6,5	683	220	10,2	1030	2270	975	2150	4,5	65
225/70R15C	112/110R	8	6,5	698	228	10,2	1120	2470	1060	2335	4,5	65
215/65R16C	106/104S	8	6,5	686	218	10,0	950	2094	900	1984	3,75	55



Power Saver II

NON DIRECTIONAL

KA-102



CITY



WEAR LIFE



DURABILITY

SIZE	LI/SI index	P.R.	R.W. inch	O.D. mm	S.W. mm	N.S.D. mm	MAX LOAD				INFLATION	
							SINGLE		DOUBLE		bar	psi
							kg	lbs.	kg	lbs.		
195R15C	103/101R	6	5,5	689	197	8,2	875	1930	825	1820	3,75	55
195R15C	106/104R	8	5,5	689	197	8,2	950	2095	900	1985	4,5	65



Super Power

NON DIRECTIONAL

JR-101



CITY



WEAR LIFE



DURABILITY

SIZE	LI/SI index	P.R.	R.W. inch	O.D. mm	S.W. mm	N.S.D. mm	MAX LOAD				INFLATION	
							SINGLE		DOUBLE		bar	psi
							kg	lbs.	kg	lbs.		
5.00R12LT	77/75P	6	3,5	564	137	9,3	415	915	395	870	3,75	55
5.00R12LT	83/81P	8	3,5	564	143	9,3	485	1070	465	1025	4,5	65



Power Saver

NON DIRECTIONAL

KA-101



CITY



WEAR LIFE



DURABILITY

SIZE	LI/SI index	P.R.	R.W. inch	O.D. mm	S.W. mm	N.S.D. mm	MAX LOAD				INFLATION	
							SINGLE		DOUBLE		bar	psi
							kg	lbs.	kg	lbs.		
165R13C	94/92N	8	4,5	601	165	9,0	670	1475	640	1410	4,5	65
175R13C	97/95N	8	5,0	613	177	9,5	730	1610	690	1520	4,5	65
185R14C	104/102N	8	5,5	653	190	10,3	900	1985	850	1875	4,5	65



Super Power

NON DIRECTIONAL

JR/KR-102



CITY



WEAR LIFE



DURABILITY

SIZE	LI/SI index	P.R.	R.W. inch	O.D. mm	S.W. mm	N.S.D. mm	MAX LOAD				INFLATION	
							SINGLE		DOUBLE		bar	psi
							kg	lbs.	kg	lbs.		
155R12C	88/86P	8	4,5	556	158	8,5	560	1235	530	1170	4,5	65
5.00R12LT	83/81P	8	3,5	567	148	9,5	485	1070	465	1025	4,5	65
5.50R12LT	92/90P	10	4,0	598	166	8,7	630	1389	600	1323	5,0	73
5.50R12LT	96/94P	12	4,0	598	166	8,7	710	1565	670	1477	6,0	87
5.50R13LT	95/93P	10	4,0	628	166	8,9	690	1520	655	1445	5,25	76
5.50R13LT	99/97P	12	4,0	628	166	8,9	765	1690	725	1600	6,25	91
5.50R13LT	102/100P	14	4,0	628	166	8,9	850	1874	800	1764	7,25	105

Power Trailer



NON DIRECTIONAL JA/KA-108



S2WR2
READY

SIZE	LI/SI index	P.R.	R.W. inch	O.D. mm	S.W. mm	N.S.D. mm	MAX LOAD				INFLATION	
							SINGLE		DOUBLE		bar	psi
							kg	lbs.	kg	lbs.		
125R12C	81/79N		3,5	510	127	5,5	462	1019	437	963	5,25	76
145/70R12C	86N		4,0	506	138	5,1	530	1168	-	-	4,25	65
155/70R12C	104N/102N		4,5	523	155	5,8	900	1980	850	1870	6,5	94
185/60R12C	104N/102N		5,5	527	185	6,2	900	1980	850	1870	6,5	94
195/60R12C	104N/102N		6,0	531	194	7,4	900	1980	850	1870	6,5	94
195/50R13C	104N/102N		6,0	525	191	7,6	900	1980	850	1870	6,5	94



Steel Techno

NON DIRECTIONAL KR-302



SIZE	LI/SI index	P.R.	R.W. inch	O.D. mm	S.W. mm	N.S.D. mm	MAX LOAD				INFLATION	
							SINGLE		DOUBLE		bar	psi
							kg	lbs.	kg	lbs.		
7.00R16LT	113/111N	10	5,5	773	193	9,8	1130	2490	1075	2370	5,25	76
7.00R16LT	115/114N	12	5,5	773	198	9,8	1230	2710	1170	2580	6,0	87
7.00R16LT	118/116N	14	5,5	773	198	9,8	1320	2905	1260	2775	6,5	94
7.50R16LT	121/119N	12	5,5	800	210	10,2	1440	3175	1370	3020	6,5	94
7.50R16LT	122/121L	14	5,5	800	210	10,2	1510	3330	1440	3175	7,0	102



Steel Techno

NON DIRECTIONAL KR-304



SIZE	LI/SI index	P.R.	R.W. inch	O.D. mm	S.W. mm	N.S.D. mm	MAX LOAD				INFLATION	
							SINGLE		DOUBLE		bar	psi
							kg	lbs.	kg	lbs.		
7.50R16LT All Steel	122/121L	14	5,5	810	209	11,6	1510	3330	1440	3175	7,0	102



Steel Force

NON DIRECTIONAL
KA/ZA-305A



CITY



WEAR LIFE



DURABILITY



RAIN & WET

SIZE	LI/SI index	P.R.	R.W. inch	O.D. mm	S.W. mm	N.S.D. mm	MAX LOAD				INFLATION	
							SINGLE		DOUBLE		bar	psi
							kg	lbs.	kg	lbs.		
7.50R16LT	122/121L	14	5,5	810	210	12,8	1510	3330	1440	3175	7,0	102
8.25R16LT	126/125L	14	6,5	860	234	14,5	1710	3770	1630	3595	6,25	91



NON DIRECTIONAL
KA/ZA-353



CITY



WEAR LIFE



DURABILITY



RAIN & WET

SIZE	LI/SI index	P.R.	R.W. inch	O.D. mm	S.W. mm	N.S.D. mm	MAX LOAD				INFLATION	
							SINGLE		DOUBLE		bar	psi
							kg	lbs.	kg	lbs.		
7.50R16LT	122/121F	14	5,5	812	205	15,1	1510	3330	1440	3175	7,0	102



Power Razor

NON DIRECTIONAL
KR-352



CITY



WEAR LIFE



DURABILITY



RAIN & WET

SIZE	LI/SI index	P.R.	R.W. inch	O.D. mm	S.W. mm	N.S.D. mm	MAX LOAD				INFLATION	
							SINGLE		DOUBLE		bar	psi
							kg	lbs.	kg	lbs.		
235/50R14LT	102L	-	7,5	598	231	8,4	850	1875	-	-	4,5	65



NON DIRECTIONAL
KA-354



CITY



WEAR LIFE



DURABILITY



RAIN & WET

SIZE	LI/SI index	P.R.	R.W. inch	O.D. mm	S.W. mm	N.S.D. mm	MAX LOAD				INFLATION	
							SINGLE		DOUBLE		bar	psi
							kg	lbs.	kg	lbs.		
7.50R16LT	114/112N	8	5,5	808	203	12,0	1175	2590	1120	2469	4,75	69



NON DIRECTIONAL
KR-355



CITY



WEAR LIFE



DURABILITY



RAIN & WET

SIZE	LI/SI index	P.R.	R.W. inch	O.D. mm	S.W. mm	N.S.D. mm	MAX LOAD				INFLATION	
							SINGLE		DOUBLE		bar	psi
							kg	lbs.	kg	lbs.		
195R15C	106/104R	8	5,5	694	195	9,0	950	2094	900	1984	4,5	65



NON DIRECTIONAL
KR-112



CITY



OFF-ROAD



WEAR LIFE



LOW NOISE



SAVE FUEL

SIZE	LI/SI index	P.R.	R.W. inch	O.D. mm	S.W. mm	N.S.D. mm	MAX LOAD				INFLATION	
							SINGLE		DOUBLE		bar	psi
							kg	lbs.	kg	lbs.		
225/95R16C	118/116R	8	6,0	831	215	7,5	1320	2910	1250	2756	4,75	69

Evotrac DT



NON DIRECTIONAL
KR-356



CITY



WEAR LIFE



DURABILITY



RAIN & WET

SIZE	LI/SI index	P.R.	R.W. inch	O.D. mm	S.W. mm	N.S.D. mm	MAX LOAD				INFLATION	
							SINGLE		DOUBLE		bar	psi
							kg	lbs.	kg	lbs.		
7.50R16LT	122/121L	14	5,5	808	209	11,6	1510	3330	1440	3175	7,0	102



COMING SOON

NON DIRECTIONAL
KU-261



CITY



WEAR LIFE



DURABILITY




RAIN & WET

SIZE	LI/SI index	P.R.	R.W. inch	O.D. mm	S.W. mm	N.S.D. mm	MAX LOAD				INFLATION	
							SINGLE		DOUBLE		bar	psi
							kg	lbs.	kg	lbs.		
5.00R12LT	88/86P	10	3,5	568	142	9,5	560	1235	530	1170	5,5	80

Super Cargo

Truck Bus Radial

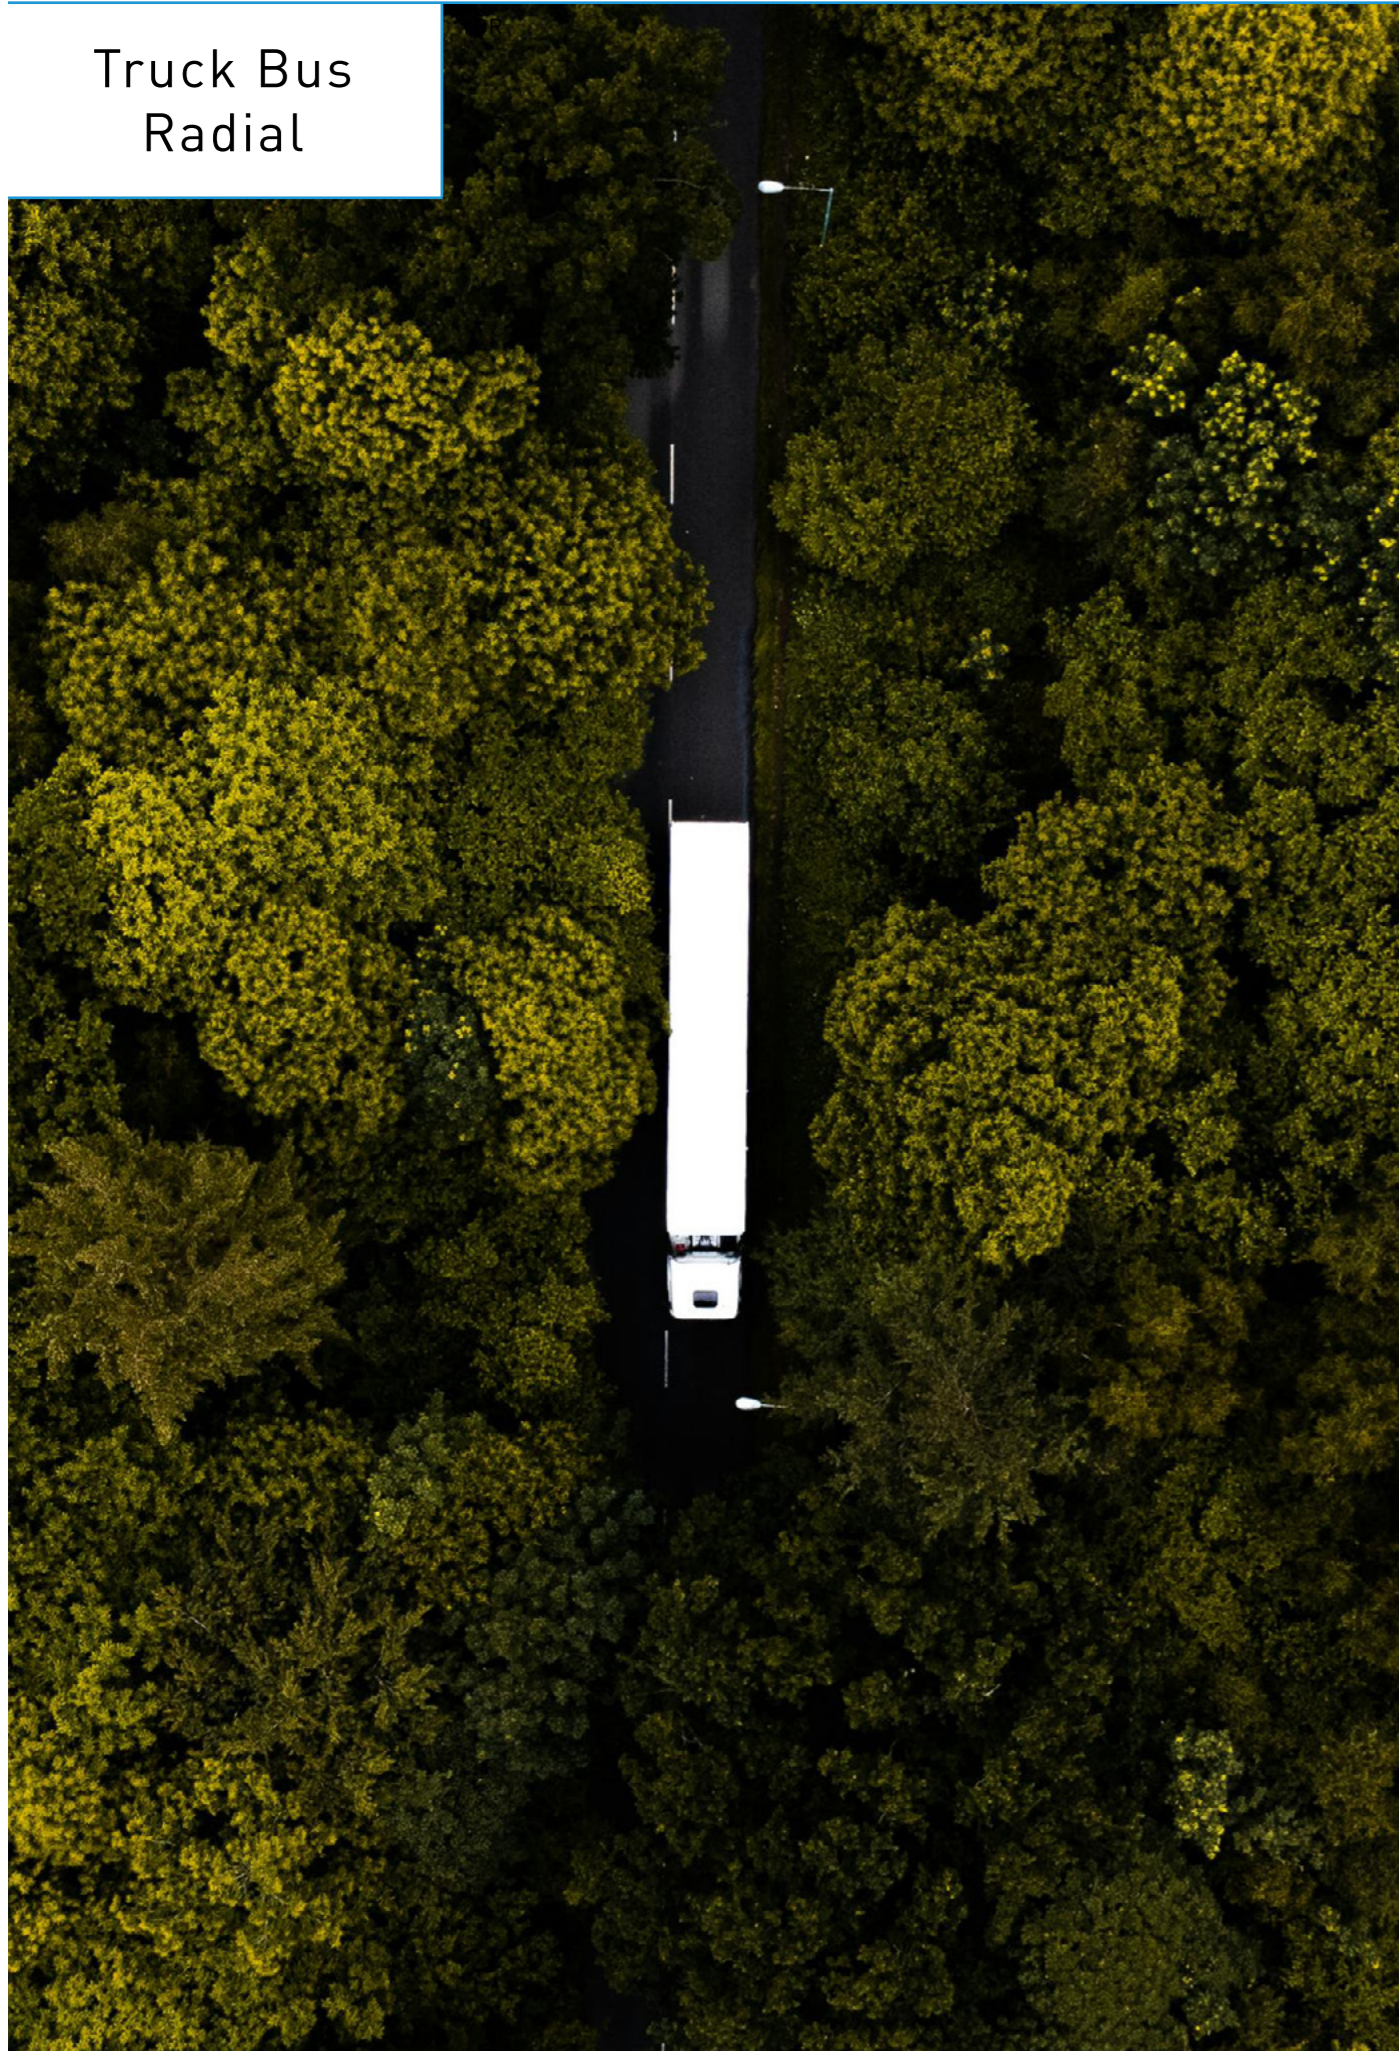

Steel Force

NON DIRECTIONAL
KA/ZA-305A



CITY



WEAR LIFE



DURABILITY



RAIN & WET

SIZE	LI/SI index	P.R.	R.W. inch	O.D. mm	S.W. mm	N.S.D. mm	MAX LOAD				INFLATION	
							SINGLE		DOUBLE		bar	psi
							kg	lbs.	kg	lbs.		
10.00R20	147/143K	16	7,5	1065	279	15,8	3075	6780	2725	6005	8,0	115



NON DIRECTIONAL
KA/ZA-353



CITY



WEAR LIFE



DURABILITY



RAIN & WET

SIZE	LI/SI index	P.R.	R.W. inch	O.D. mm	S.W. mm	N.S.D. mm	MAX LOAD				INFLATION	
							SINGLE		DOUBLE		bar	psi
							kg	lbs.	kg	lbs.		
11.00R20	152/149F	18	8,0	1094	296	22,8	3550	7830	3250	7160	9,0	130
12.00R20	157/153F	20	8,5	1146	320	24,1	4125	9095	3650	8050	9,0	130
12.00R24	160/157F	20	8,5	1260	318	29,5	4500	9920	4125	9095	9,0	130
325/95R24	162/160F	22	8,5	1260	318	29,5	4750	10500	4500	9920	8,5	123

On the Sidewall

The Load Index and Speed Symbol give unambiguous and comparable information on the maximum speed supported at the associated load capacity - independent of manufacture and dimension - as the codes can be directly converted to actual values. The tables give an overview of relevant LI and SS codes.

Load Index


LI	kg	lb	LI	kg	lb	LI	kg	lb	LI	kg	lb	LI	kg	lb	LI	kg	lb
0	45	99	28	100	220	56	224	494	84	500	1102	112	1120	2469	140	2500	5512
1	46,2	102	29	103	227	57	230	507	85	515	1135	113	1150	2535	141	2575	5677
2	47,5	105	30	106	234	58	236	520	86	530	1168	114	1180	2601	142	2650	5842
3	48,7	107	31	109	240	59	243	536	87	545	1202	115	1215	2679	143	2725	6008
4	50	110	32	112	247	60	250	551	88	560	1235	116	1250	2756	144	2800	6173
5	51,5	114	33	115	254	61	257	567	89	580	1279	117	1285	2833	145	2900	6393
6	53	117	34	118	260	62	265	584	90	600	1323	118	1320	2910	146	3000	6614
7	54,5	120	35	121	267	63	272	600	91	615	1356	119	1360	2998	147	3075	6779
8	56	123	36	125	276	64	280	617	92	630	1389	120	1400	3086	148	3150	6944
9	58	128	37	128	282	65	290	639	93	650	1433	121	1450	3197	149	3250	7165
10	60	132	38	132	291	66	300	661	94	670	1477	122	1500	3307	150	3350	7385
11	61,5	136	39	136	300	67	307	677	95	690	1521	123	1550	3417	151	3450	7606
12	63	139	40	140	309	68	315	694	96	710	1565	124	1600	3527	152	3550	7826
13	65	143	41	145	320	69	325	716	97	730	1609	125	1650	3638	153	3650	8047
14	67	148	42	150	331	70	335	739	98	750	1653	126	1700	3748	154	3750	8267
15	69	152	43	155	342	71	345	761	99	775	1709	127	1750	3858	155	3875	8543
16	71	157	44	160	353	72	355	783	100	800	1764	128	1800	3968	156	4000	8818
17	73	161	45	165	364	73	365	805	101	825	1819	129	1850	4079	157	4125	9094
18	75	165	46	170	375	74	375	827	102	850	1874	130	1900	4189	158	4250	9370
19	77,5	171	47	175	386	75	387	853	103	875	1929	131	1950	4299	159	4375	9645
20	80	176	48	180	397	76	400	882	104	900	1984	132	2000	4409	160	4500	9921
21	82,5	182	49	185	408	77	412	908	105	925	2039	133	2060	4541	161	4625	10196
22	85	187	50	190	419	78	425	937	106	950	2094	134	2120	4674	162	4750	10472
23	87,5	193	51	195	430	79	437	963	107	975	2149	135	2180	4806	163	4875	10747
24	90	198	52	200	441	80	450	992	108	1000	2205	136	2240	4938	164	5000	11023
25	92,5	204	53	206	454	81	462	1019	109	1030	2271	137	2300	5071	165	5150	11354
26	95	209	54	212	467	82	475	1047	110	1060	2337	138	2360	5203	166	5300	11684
27	97,5	215	55	218	481	83	487	1074	111	1090	2403	139	2430	5357	167	5450	12015

Speed Symbol

SI	km/h	mph
A1	5	3
A2	10	6
A3	15	9
A4	20	13
A5	25	16
A6	30	19
A7	35	22
A8	40	25
B	50	31
C	60	38
D	65	41
E	70	44
F	80	50
G	90	56
J	100	63
K	110	69
L	120	75
M	130	81
N	140	88
P	150	94
Q	160	100
R	170	106
S	180	113
T	190	119
U	200	125
H	210	131
V	240	150
W	270	169
Y	300	188



facebook

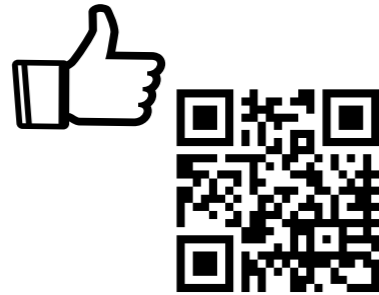DELIUM
ROAD SYMBIOSIS

**SCAN THE QR-CODE
WITH YOUR PHONE.**

You'll be redirected to DELIUM TIRES official fanpage. Like us, you'll be up-to date about DELIUM's latest products, news and events.

**WE LIKE
TO BE LIKED
SO PLEASE
LIKE US!**

www.facebook.com/DeliumTires

The Company reserves the right to make all technical modifications necessary to improve the products offered in this catalogue, without prior notice and does not assume any liability for slight colour differences that may be noted between originals and printed material.
Some models, sizes and colours may not be available in all markets.

Copyright 2018 by PT INDUSTRI KARET DELI. Subject to technical changes, no reliability for printer's error. 03/18.

What's #symbiosis?

“symbiosis”
[sim-bee-oh-sis, -bahy-]

noun

Biology: the living together of two dissimilar organisms, as in mutualism, commensalism, amensalism, or parasitism.

SYMBIOSIS is a close relationship between elements, things or people of a different nature in which the organisms benefit from living together in intimate communion.

Our tires are studied and developed to work in perfect compatibility with the road.

An intimate connection between two elements creating a perfect balance.

Road symbiosis happens when tire and road work in complete harmony together.

DELIVUM

DELIUM

 DeliTire.com

 facebook.com/SwallowDelitireDelium

 facebook.com/DeliumTires

 instagram.com/SwallowDelitireDelium

PT. INDUSTRI KARET DELI
JL. Kom. Laut Yos Sudarso
km 8.3 Medan 20241
North Sumatera - Indonesia

Phone: [62 61] 6612611
Fax: [62 61] 6614611
Email: sales@delitire.com